



SUBMITTAL/TECHNICAL DATA SHEET

STANDARD OPTIONS

MATERIAL:

DOOR: Aluminum diamond plate 1/4"
FRAME: 2" x 2" x 1/4" aluminum angle

HINGE:

Heavy duty aluminum continuous
piano hinge (0.080").

Note: Hinge on second dimension
(Height)

LOCK / LATCH:

Recessed handle operated cam latch

OPTIONS AVAILABLE

LOCK / LATCH:

Key operated recessed handle cam
latch

RECESS:

Recessed floor hatch optional - see
BA-AFL-RAFL model

CAUTION:

The BA-AFL floor access door is
designed to support a live load of 300
pounds/sq.foot and includes a hold
open arm to keep the door in an open
position

For a complete list of options visit
www.BestAccessDoors.com

Scan  or  Click




To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**




SKU: **BA-AFL**

DIAMOND PLATED ALUMINUM FLOOR HATCH

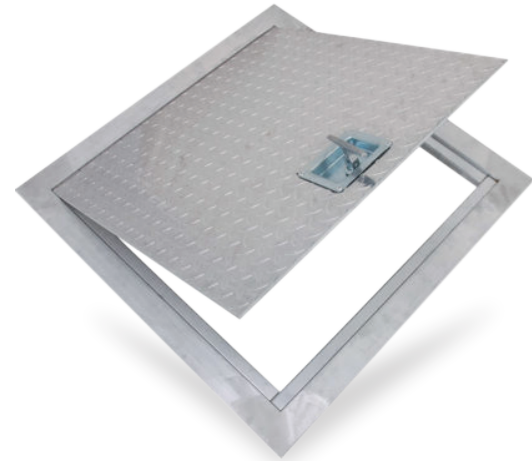

■ INSTALLATION


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

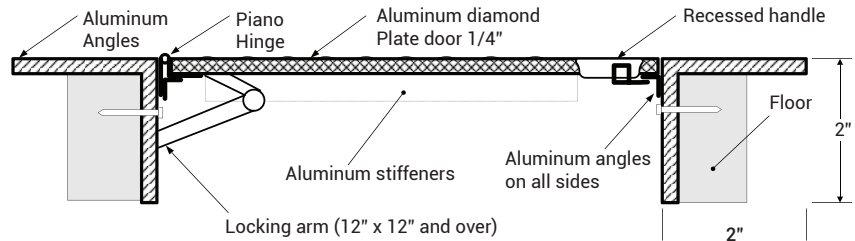

■ DIMENSIONS AND APPEARANCE

HATCH SIZE - W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS KG
24 x 24 (609 x 609)	1	35 15.9
24 x 36 (609 x 914)	1	44 20

Rough floor opening is door size + 1/2" or + 13mm

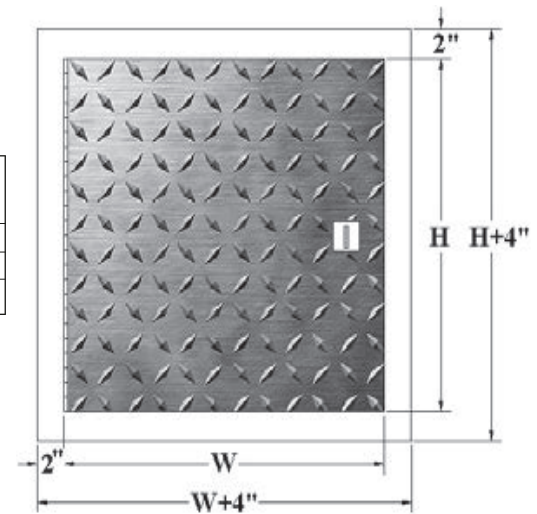

■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com