



SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTION

The AID is a universal, exterior, non-rated access panel. The 20 ga /1mm door provides strength and rigidity and features a key operated turn latch closure. The door is equipped with a continuous stainless steel piano hinge and suitable for left- or right-hand operation. It consists of a welded inner and outer aluminum frame with an aluminum inlay.

SPECIFICATION

INSULATION: 1 1/2" Polyurethane

GASKETING: Extruded Santoprene

The door can be supplied with an optional non-locking or locking handle. Dual-acting non-locking handles enable to open this door from inside or outside.

CAPABILITIES: This popular panel can be mounted in exterior or interior walls. Suitable for mechanical contractors.

ADVANTAGE

- Inexpensive solution
- Short-term delivery possible
- Quick, trouble-free installation
- Technically mature solution
- Universally applicable
- Lockable

OPTIONS

- LH – Locking Handle (Exterior Only 1 per Door)
- M – Mortise Lock Preparation (1 1/8")
- NH – Non-Locking Handle
- TL – 1/4 Turn Latch

For a complete list of options visit
www.BestAccessDoors.com

SKU: BA-AID

EXTERIOR ACCESS PANEL

NON-REMOVABLE




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

The AID access panel is available in the following standard sizes:

AID System Code	Dimensions in mm	
	A	B
AID200200AL	200	200
AID300300AL	300	300
AID400400AL	400	400
AID500500AL	500	500
AID600600AL	600	600

All standard sizes are available from stock at short notice.

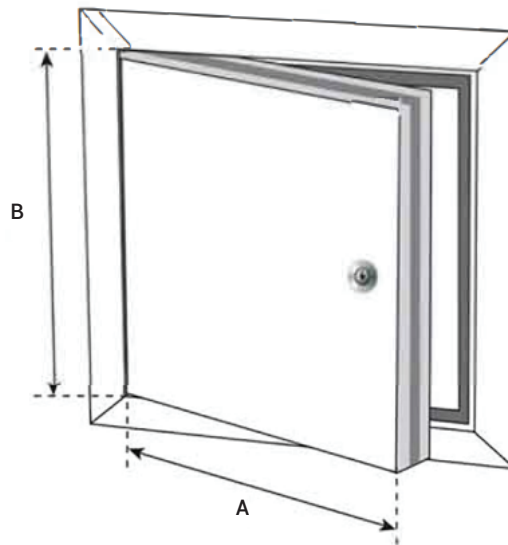

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com