



Quality Access Doors- **FAST!**

STANDARD OPTIONS

MATERIAL: 16-gauge cold-rolled steel

HINGE: Continuous piano hinge.
Note: Hinge on second dimension (Height)

LOCK/LATCH: Key-operated cylinder cam latch

FINISH: High quality white powder coat primer

ROUGH OPENING: Door sizes + 1/4" or + 6mm

PACKAGING: Individually wrapped, 1 door per box

GASKETING: Neoprene around perimeter of door frame

POPULAR OPTIONS

LOCK/LATCH: Pinned hex head cam latch (-90)

MATERIAL: Stainless Steel (SS), Galvanneal steel (GS)

For a complete list of options visit
www.BestAccessDoors.com

Scan  or  Click



To view Pricing and Additional Product Info.

LEED READY: THIS PRODUCT CONTRIBUTES TO LEED® CREDITS



SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-ALD-DF**


ANTI-LIGATURE DOOR

WITH DRYWALL BEAD FLANGE



■ INSTALLATION

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

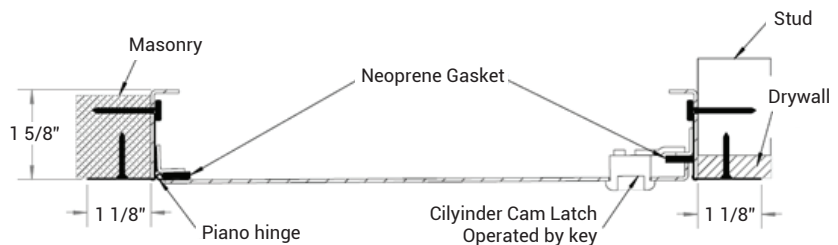


■ DIMENSIONS AND APPEARANCE

DOOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS KG	
12 x 12 (305 x 305)	2	5.0	2.3
16 x 16 (406 x 406)	2	8.0	3.6
18 x 18 (457 x 457)	2	10	4.5
24 x 24 (610 x 610)	2	15	6.8
24 x 36 (610 x 914)	3	22	10

Rough wall opening is door size + 1/4" or + 6 mm

The HHD-GYP model is recommended for dimensions over 36" x 36".

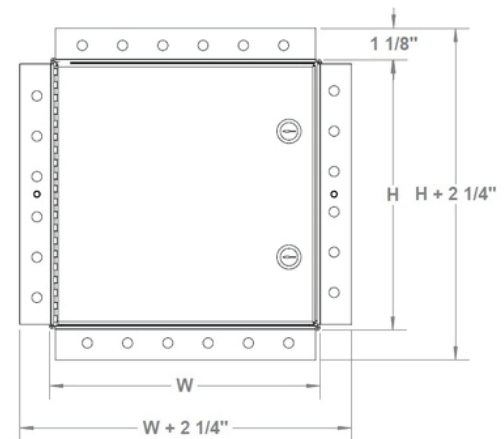

■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com