



Quality Access Doors- **FAST!**

DESCRIPTION

A premium flash mount exhaust fan cover for a 20"x20" drywall opening. This cover can also be used on a cold air return, and yields a 18.375"x18.375" accessible area. (NOTE: your exhaust fan and/or motor needs to fit through this area).

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board cover.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.375" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 Degree angled slots for directional venting and to hide a fan.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco- Friendly Manufacturing and Non-Hazardous.

SPECIFICATIONS

- Over 337.64 square inches (2178.31 square centimeters) of accessible area.
- Overall dimensions are 22.375" x 22.375" x 0.5" (568.3mm x 568.3mm x 12mm).
- Product weight is 3.6 pounds (1.64 kilograms)

For a complete list of options visit
www.BestAccessDoors.com

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-EXHAUST-20**



WALL AND CEILING EXHAUST FAN COVER

REMOVABLE & MAGNETIC



DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

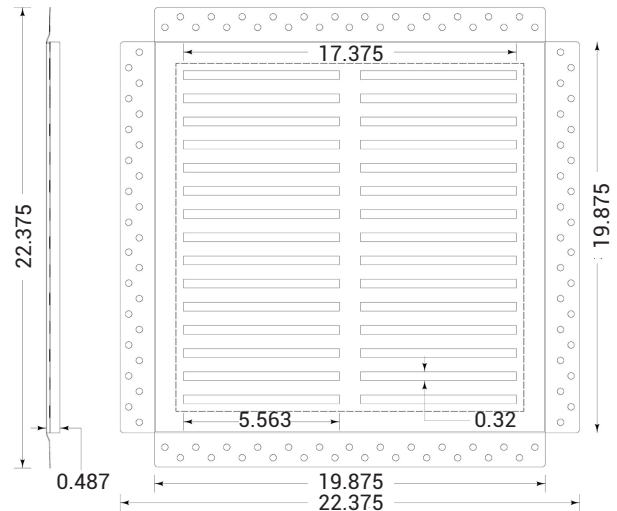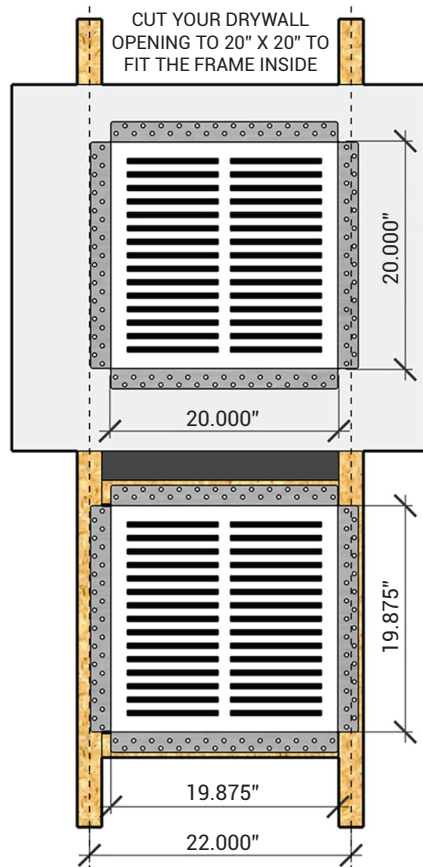

Material Information:

Raw Material: Cement, fibres, quartz sand, non- hazardous fillers.

Density: $1.0 < D \leq 1.2 \text{ g/cm}^3$

Asbestos Content: 100% asbestos-free

Fire resistance: Non-combustible edge and adjustable diffuser.

Water Absorption: $\leq 40\%$

Resistant Bending Strength: $\leq 10.5 \text{ MPa dry}$

Moisture Movement: 0.25 %

Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL :			
TAGGING INSTRUCTIONS :	(signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com