

Quality Access Doors- FAST

## DESCRIPTION

A premium flush mount exhaust fan cover for a 6"x6" drywall opening. This cover can also be used as a cold air return, and yields a 6.125"x6.125" accessible area. (NOTE: your exhaust fan and/or motor needs to fit through this area).

## **APPLICATION**

- Designed for 1/2" and 5/8" thick drywall. Suitable for both wall and ceiling
- installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

# **FEATURES**

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250"diametre x 0.060" thick).
- · Easy installation, primed and ready to paint.
- 20 degree angled slots for directional venting and to hide a fan.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

## **SPECIFICATIONS**

- Over 14.36 square inches (92.64 square centimeters) of open area.
- Slot Size: 5.613" x 0.32 (142.5mm x 8.12mm).
- 8 angeld horizontal slots.
- Overall dimensions are 10.125" x 10.125" x 0.5" (257.17mm x 257.17mm x 12mm).
- Product weight is 1.2 pounds (0.54 kilograms)

For a complete list of options visit www.BestAccessDoors.com

Scan or Click

# SUBMITTAL/TECHNICAL DATA SHEET




REMOVABLE AND MAGNETIC



# ■ DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

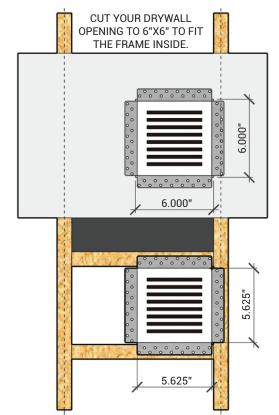

16.000"

#### **MATERIAL INFORMATION:**

Raw Material: cement, fibres, quartz sand, non-hazardous fillers. **Density:** 1.0< D ≤1.2 g/cm3 Asbestos Content: 100% asbestos-free Fire resistance: non-combustible Water Absorption: ≤40% Resistant Bending Strength: ≤10.5 MPa dry Moisture Movement: 0.25 % Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing.



# PROJECT DATA

### **Custom Sizes Available - Fast!**

	PROJECT NAME :	QTY	w	Н	OPTIONS
	ARCHITECT:				
2	DEALER:				
	CONTRACTOR:				
	LOCATION:	SPECIAL INSTRUCTIONS :			
	DATE:				
	TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL : (signature or stamp)			

ACCESS

To view Pricing and Additional Product Info.



TELEPHONE: 1-800-483-0823 FAX: 1-888-828-6021



228 PARK AVE. S. #76520 NEW YORK, NY, 10003



WEBSITE: www.BestAccessDoors.com