



Quality Access Doors- FAST!

STANDARD OPTIONS

MATERIAL:

16 gauge cold rolled steel frame and
20 gauge galvalume steel door

INSULATION: Mineral wool

HINGE: Continuous piano hinge.

Note: Hinge on second dimension
(Height)

LOCK / LATCH: Self latching tool-key
operated slam latch and/or ring
operated slam latch, both included.

INSIDE PANEL RELEASE:

Standard on all doors over 12" x 12"

AUTOMATIC PANEL CLOSER:

Standard on all doors

FINISH: High quality white powder
coat primer

PACKAGING:

Individually wrapped, 1 per box

OPTIONS AVAILABLE

LOCK / LATCH:

- Mortise deadbolt lock
- Hex head slam latch
- Handle operated slam latch
- Mortise preparation for cylinder
(Cylinder optional)

MATERIAL:

Stainless steel #4 (brushed finish)

MASONRY ANCHOR:

Available on all sizes

For a complete list of options visit
www.BestAccessDoors.com

Scan  or  Click



To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**



SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-FRI-DF**

FIRE RATED ACCESS PANEL INSULATED


WITH MUD IN FLANGE




INSTALLATION

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)


RECOMMENDED CEILING INSTALLATION PROCEDURE FOR 3 HOUR RATING

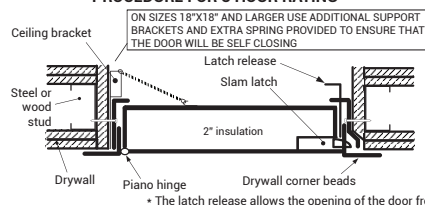

RECOMMENDED CEILING INSTALLATION PROCEDURE FOR 1 HOUR RATING




RECOMMENDED WALL INSTALLATION PROCEDURE FOR 1 HOUR RATING

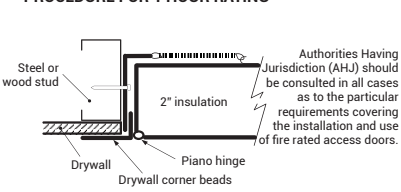

DIMENSIONS AND APPEARANCE

STANDARD SIZES:

DOOR SIZE W x H inches (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 x 8 (203 x 203)	1	7	3.2
10 x 10 (254 x 254)	1	8	3.6
12 x 12 (304 x 304)	1	10	4.5
14 x 14 (355 x 355)	1	12	5.4
16 x 16 (406 x 406)	1	14	6.4
18 x 18 (457 x 457)	1	17	7.7
22 x 22 (558 x 558)	1	24	10.9
22 x 30 (558 x 762)	1	31	14.1
22 x 36 (558 x 914)	2	38	17.2
24 x 24 (609 x 609)	1	29	13.2
24 x 36 (609 x 914)	2	36	16.4
* 24 x 48 (609 x 1219)	2	47	21.3
* 30 x 30 (762 x 762)	1	40	18.1
* 32 x 32 (812 x 812)	2	44	20
* 36 x 36 (914 x 914)	2	53	24
* 48 x 48 (1219 x 1219)	2	83	37.7

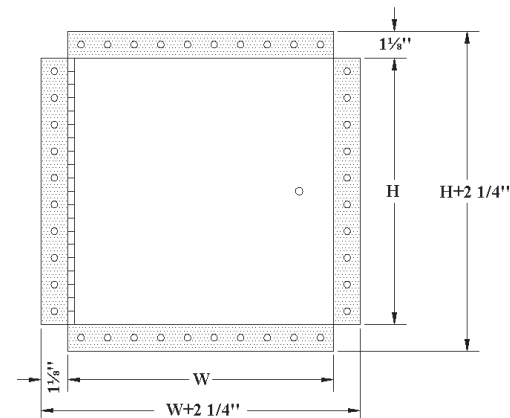

ROUGH WALL OPENING IS DOOR SIZE + 1/4" OR + 6MM

*NOT AVAILABLE FOR CEILING RATING (MAXIMUM 24"x36")

FIRE RATING INFORMATION ON PAGE 2

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:

1-800-483-0823

FAX:

1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:

www.BestAccessDoors.com

E-MAIL:

info@BestAccessDoors.com

■ FIRE RATING

FIRE RATED ACCESS DOORS, FOR VERTICAL USE, ARE SUBJECT TO THE FOLLOWING:

VERTICAL WALL ASSEMBLIES

Fire rated access doors, for vertical use, are subject to the following:

CERTIFICATION

UL 10B (2009), NFPA 252 (2012), CAN/ULC S104 (2010).

RATING ACHIEVED

3 hours, neutral/negative pressure

MAXIMUM SIZE

48" x 48" (1219mm x 1219mm), maximum area of 2304 in², tolerance on height and width limitation is more or less 3" (76mm) as long as the area does not exceed 2304 in².

TEMPERATURE RISE

250°F (121°C) after 30 minutes and 450°F (232°C) after 60 minutes.

FIRE RATED ACCESS DOORS, FOR HORIZONTAL USE, ARE SUBJECT TO THE FOLLOWING:

HORIZONTAL CEILING ASSEMBLIES

Fire rated access doors, for horizontal use, are subject to the following:

CERTIFICATION

ASTM E119 (2012), CAN/ULC S101 (2007)

RATING ACHIEVED

3 hours in non-combustible construction and 1 hour in combustible construction


MAXIMUM SIZE

24"X36" (610 mm X 914 mm) (hinges and latches on the side of 36"), tolerance on dimension limitations are more or less 3" (76 mm) as long as the area does not exceed 864 in².

TEMPERATURE RISE

Within allowable per ASTM E119 and CAN/ULC S101


■ INSTALLATION: WALLS AND CEILINGS

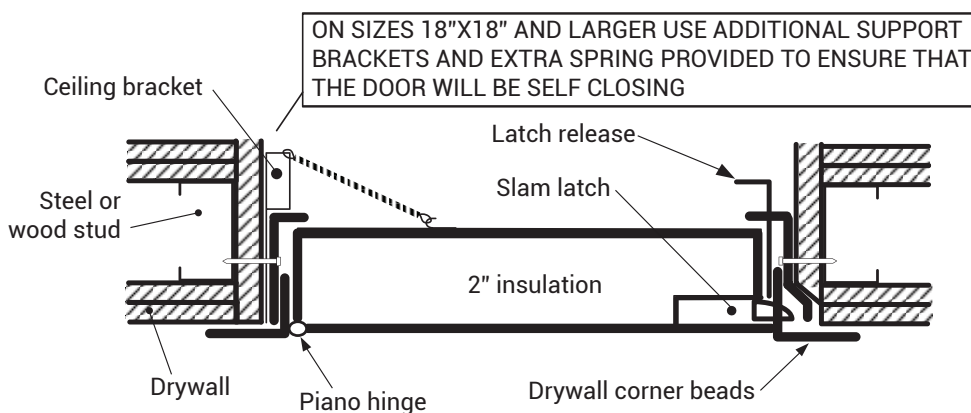


RECOMMENDED CEILING INSTALLATION PROCEDURE FOR 3 HOUR RATING

* The latch release allows the opening of the door from inside

RECOMMENDED CEILING INSTALLATION PROCEDURE FOR 1 HOUR RATING

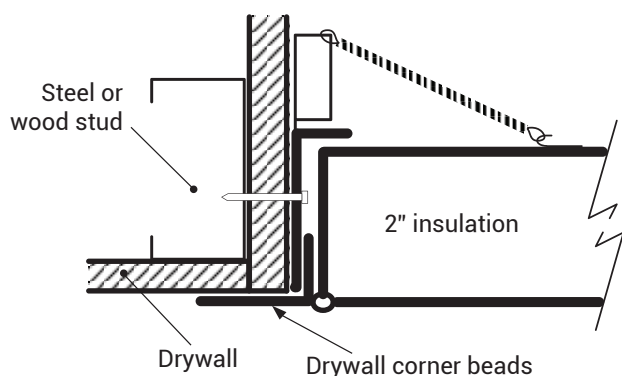

RECOMMENDED WALL INSTALLATION PROCEDURE FOR 1 HOUR RATING

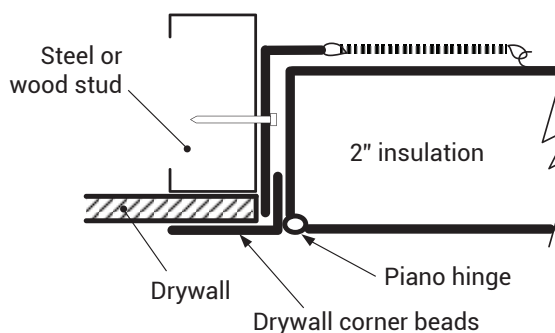

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors.

TELEPHONE:

1-800-483-0823

FAX:

1-888-828-6021

228 PARK AVENUE
S. #76520
NEW YORK, NY, 10003

WEBSITE:

www.BestAccessDoors.com

E-MAIL:

info@BestAccessDoors.com