



Quality Access Doors- **FAST!**

STANDARD OPTIONS

MATERIAL:

16 gauge cold rolled steel frame and
14 gauge galvalume steel door

INSULATION: Mineral wool

HINGE:

Continuous piano hinge.

Note: Hinge on second dimension
(Height)

LOCK / LATCH:

Self latching tool-key operated slam
latch and/or ring operated slam latch,
both included

INSIDE PANEL RELEASE:

Standard on all doors over 12" x 12"

AUTOMATIC PANEL CLOSER:

Standard on all doors

FINISH:

High quality white powder coat
primer

PACKAGING:

Individually wrapped, 1 per box

OPTIONS AVAILABLE

LOCK / LATCH:

- Mortise deadbolt lock
- Hex head slam latch
- Handle operated slam latch
- Mortise preparation for cylinder
(Cylinder optional)

MATERIAL:

Stainless steel #4 (brushed finish)

MASONRY ANCHOR:

Available on all sizes

For a complete list of options visit
www.BestAccessDoors.com

Scan  or  Click



To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**



SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-FRI-HS**

FIRE RATED SECURITY ACCESS PANEL




■ INSTALLATION


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

Wrapping of stud
required for 2 and 3 hour
ceiling applications only

[3 HOUR CEILING APPLICATION]

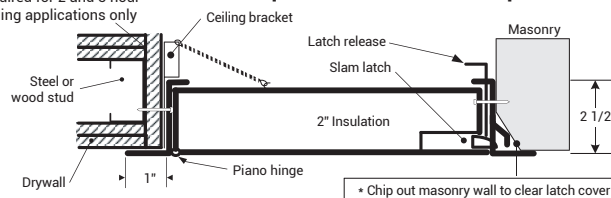


[1 HOUR CEILING APPLICATION]

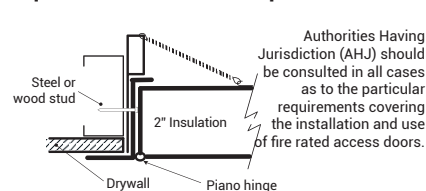

■ DIMENSIONS AND APPEARANCE

STANDARD SIZES:

DOOR SIZE W X H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 x 8 (203 x 203)	1	7	3.2
10 x 10 (254 x 254)	1	8	3.6
12 x 12 (304 x 304)	1	10	4.5
14 x 14 (355 x 355)	1	12	5.4
16 x 16 (406 x 406)	1	14	6.4
18 x 18 (457 x 457)	1	17	7.7
22 x 22 (558 x 558)	1	20	9.1
22 x 30 (558 x 762)	1	30	13.6
22 x 36 (558 x 914)	2	34	15.5
24 x 24 (609 x 609)	1	28	12.7
24 x 36 (609 x 914)	2	36	16.4
* 24 x 48 (609 x 1219)	2	48	21.8
* 30 x 30 (762 x 762)	1	40	18.1
* 32 x 32 (812 x 812)	2	43	19.5
* 36 x 36 (914 x 914)	2	50	22.7
* 48 x 48 (1219 x 1219)	2	83	37.7

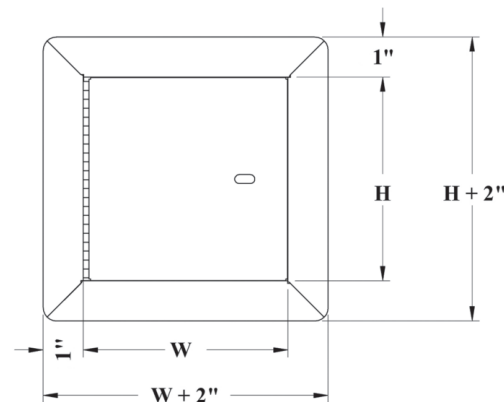

ROUGH WALL OPENING IS DOOR SIZE + 1/4" OR + 6MM
*NOT AVAILABLE FOR CEILING RATING (MAXIMUM 24"X36")
FIRE RATING INFORMATION ON PAGE 2

■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

■ FIRE RATING

FOR INSTALLATION IN VERTICAL WALL ASSEMBLIES:

CERTIFIED TO STANDARDS: UBC 7-2 (1997), UL 10B (1997), UL 10B (2009), NFPA 252 (2003), NFPA 252 (2008), NFPA 252 (2012), CAN/ULC S104 (R1985), CAN/ULC S104 (2010).
RATING ACHIEVED: 3 hours, neutral/negative pressure.
MAXIMUM SIZE: 48" wide x 48" high (1219 mm x 1219 mm).
Maximum area of 2304 in²

Tolerance on height and width limitation is $\pm 3"$ (76 mm) as long as the area does not exceed 2304 in²

TEMPERATURE RISE: 250°F (121°C) after 30 min. 450°F (232°C) after 60 min.

FOR INSTALLATION IN HORIZONTAL CEILING ASSEMBLIES:

CERTIFIED TO STANDARDS: ASTM E119 (2012), CAN/ULC S101 (2007).

RATING ACHIEVED: 3 hours in non-combustible construction. 1 hour in combustible construction.

MAXIMUM SIZE: 24" x 36" (hinges & latch on 36" long sides) (610 mm x 914 mm).


Tolerances on dimension limitations are $\pm 3"$ (76 mm) as long as the area does not exceed 864 in²

TEMPERATURE RISE: Not applicable.


■ INSTALLATION: WALLS AND CEILINGS

Wrapping of stud required for 2 and 3 hour ceiling applications only

[3 HOUR CEILING APPLICATION]

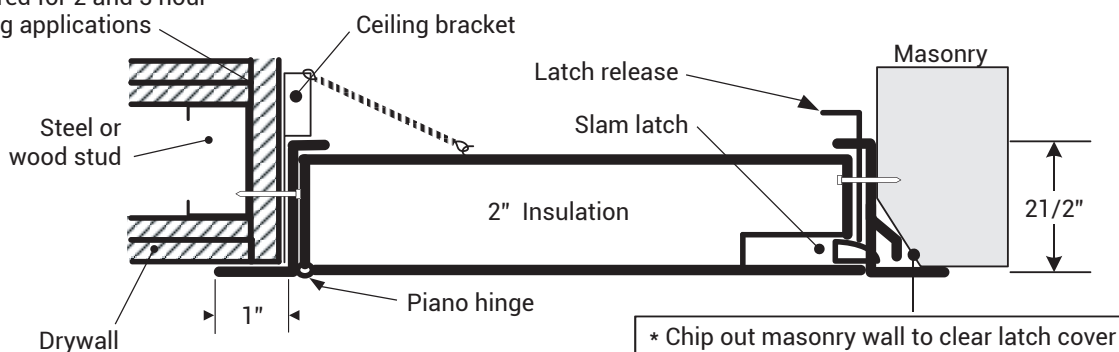

[1 HOUR CEILING APPLICATION]

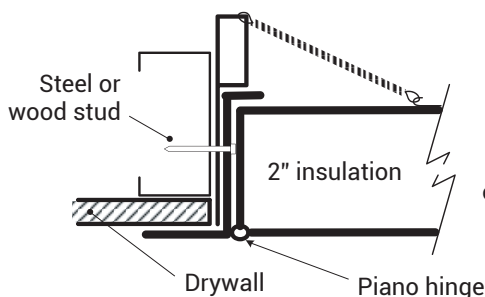

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors.



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVENUE
S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@BestAccessDoors.com