



Quality Access Doors- FAST!

## STANDARD OPTIONS

### MATERIAL:

16 gauge cold rolled steel frame & 20 gauge galvanized steel door

**HINGE:** Continuous piano hinge.  
Note: Hinge on second dimension (Height)

**INSULATION:** Mineral wool

### LOCK / LATCH:

Self latching tool-key operated slam latch and/or ring operated slam latch, both included

### INSIDE PANEL RELEASE:

Standard on all doors over 12" x 12"

### AUTOMATIC PANEL CLOSER:

Standard on all doors

### FINISH:

Stainless steel 304 #4 (brushed finish)

### PACKAGING:

Individually wrapped, 1 per box

## OPTIONS AVAILABLE

### LOCK / LATCH:

- Mortise deadbolt lock
- Hex head slam latch
- Handle operated slam latch
- Mortise preparation for cylinder (cylinder optional)

### MATERIAL:

Stainless steel #4 (brushed finish)

### MASONRY ANCHOR:

Available on all sizes

For a complete list of options visit  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)

Scan or Click



To view Pricing and  
Additional Product Info.

**LEED READY: THIS PRODUCT  
CONTRIBUTES TO LEED® CREDITS**



# SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-FRI-SS**

## FIRE RATED ACCESS PANEL INSULATED

STAINLESS STEEL




## INSTALLATION


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

Wrapping of stud  
required for 2 and 3 hour  
ceiling applications only

### [ 3 HOUR CEILING APPLICATION ]

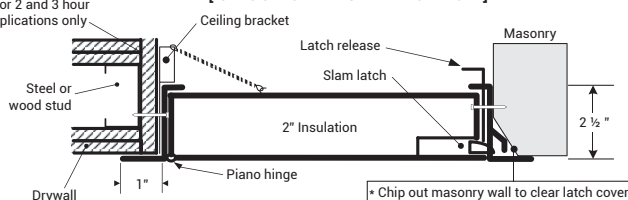

### [ 1 HOUR CEILING APPLICATION ]




Authorities Having  
Jurisdiction (AHJ) should  
be consulted in all cases  
as to the particular  
requirements covering  
the installation and use  
of fire rated access doors.

## DIMENSIONS AND APPEARANCE

### STANDARD SIZES:

| DOOR SIZE W x H<br>INCHES (MM) | NUMBER<br>OF LOCKS | WEIGHT<br>LBS | KG   |
|--------------------------------|--------------------|---------------|------|
| 8 x 8 (203 x 203)              | 1                  | 7             | 3.2  |
| 10 x 10 (254 x 254)            | 1                  | 8             | 3.6  |
| 12 x 12 (304 x 304)            | 1                  | 10            | 4.5  |
| 14 x 14 (355 x 355)            | 1                  | 12            | 5.4  |
| 16 x 16 (406 x 406)            | 1                  | 14            | 6.4  |
| 18 x 18 (457 x 457)            | 1                  | 17            | 7.7  |
| 22 x 22 (558 x 558)            | 1                  | 20            | 9.1  |
| 22 x 30 (558 x 762)            | 1                  | 30            | 13.6 |
| 22 x 36 (558 x 914)            | 2                  | 34            | 15.5 |
| 24 x 24 (609 x 609)            | 1                  | 28            | 12.7 |
| 24 x 36 (609 x 914)            | 2                  | 36            | 16.4 |
| * 24 x 48 (609 x 1219)         | 2                  | 48            | 21.8 |
| * 30 x 30 (762 x 762)          | 1                  | 40            | 18.1 |
| * 32 x 32 (812 x 812)          | 2                  | 43            | 19.5 |
| * 36 x 36 (914 x 914)          | 2                  | 50            | 22.7 |
| * 48 x 48 (1219 x 1219)        | 2                  | 83            | 37.7 |

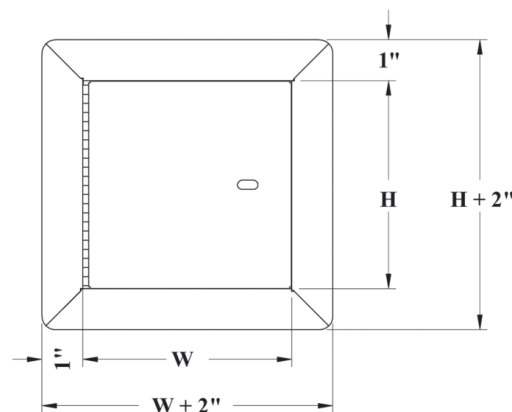

ROUGH WALL OPENING IS DOOR SIZE + 1/4" OR + 6MM

\* Not available for ceiling rating (maximum 24"x36")

FIRE RATING INFORMATION ON PAGE 2

## PROJECT DATA

Custom Sizes Available - Fast!

| PROJECT NAME :         | QTY                                          | W | H | OPTIONS |
|------------------------|----------------------------------------------|---|---|---------|
| ARCHITECT :            |                                              |   |   |         |
| DEALER :               |                                              |   |   |         |
| CONTRACTOR :           |                                              |   |   |         |
| LOCATION :             | SPECIAL INSTRUCTIONS :                       |   |   |         |
| DATE :                 |                                              |   |   |         |
| TAGGING INSTRUCTIONS : | SUBMITTAL APPROVAL :<br>(signature or stamp) |   |   |         |

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@BestAccessDoors.com](mailto:info@BestAccessDoors.com)

## ■ FIRE RATING

### FOR INSTALLATION IN VERTICAL WALL ASSEMBLIES:

CERTIFIED TO STANDARDS: UBC 7-2 (1997), UL 10B (1997), UL 10B (2009), NFPA 252 (2003), NFPA 252 (2008), NFPA 252 (2012), CAN/ULC S104 (R1985), CAN/ULC S104 (2010).  
RATING ACHIEVED: 3 hours, neutral/negative pressure.  
MAXIMUM SIZE: 48" wide x 48" high (1219 mm x 1219 mm).  
Maximum area of 2304 in<sup>2</sup>

Tolerance on height and width limitation is  $\pm 3"$  (76 mm) as long as the area does not exceed 2304 in<sup>2</sup>

TEMPERATURE RISE: 250°F (121°C) after 30 min. 450°F (232°C) after 60 min.

### FOR INSTALLATION IN HORIZONTAL CEILING ASSEMBLIES:

CERTIFIED TO STANDARDS: ASTM E119 (2012), CAN/ULC S101 (2007).

RATING ACHIEVED: 3 hours in non-combustible construction.

1 hour in combustible construction.


MAXIMUM SIZE: 24" x 36" (hinges & latch on 36" long sides) (610 mm x 914 mm).

Tolerances on dimension limitations are  $\pm 3"$  (76 mm) as long as the area does not exceed 864 in<sup>2</sup>


TEMPERATURE RISE: Not applicable.

## ■ INSTALLATION: WALLS AND CEILINGS

Wrapping of stud required for 2 and 3 hour ceiling applications only

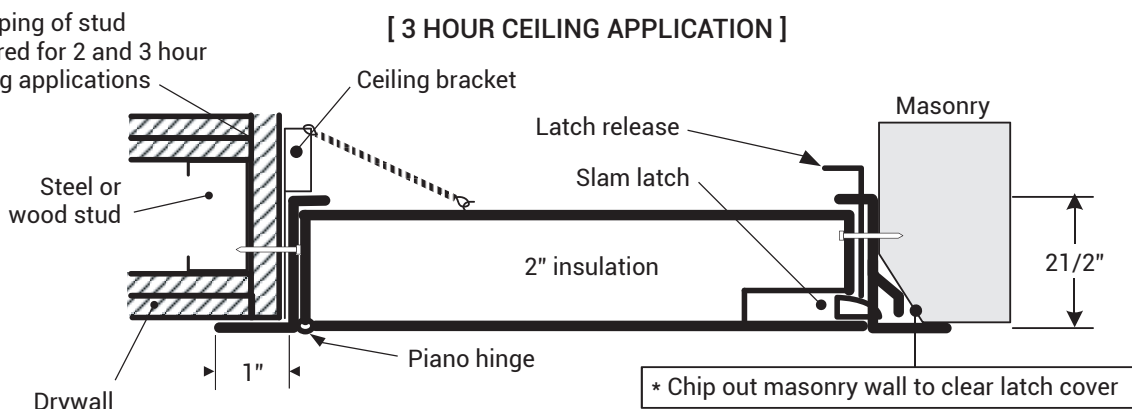

### [ 1 HOUR CEILING APPLICATION ]

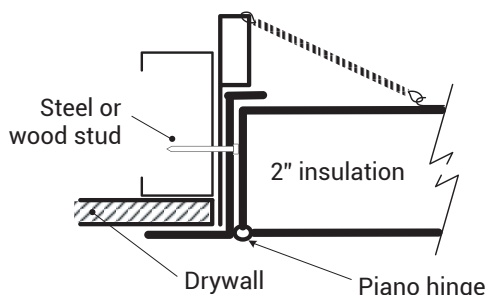

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors.



TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVENUE  
S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@BestAccessDoors.com](mailto:info@BestAccessDoors.com)