



Quality Access Doors- FAST!

STANDARD OPTIONS

MATERIAL:

16 gauge cold rolled steel frame &
20 gauge galvalume steel door

HINGE:

Continuous piano hinge allows
opening to 89°

Note: Hinge on second dimension
(Height)

LOCK / LATCH:

Self latching ring operated slam latch
inside and a hex head slam latch
outside

FINISH:

High quality white powder coat
primer

PACKAGING:

Individually wrapped, 1 per box

OPTIONS AVAILABLE

MATERIAL:

Stainless steel 304 #4 (brushed
finish)

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-FRU**



FIRE RATED ACCESS PANEL INSULATED UPWARD OPENING

FOR CEILINGS ONLY



■ INSTALLATION

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

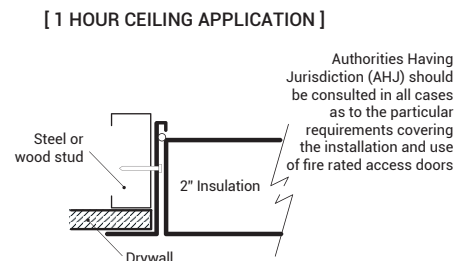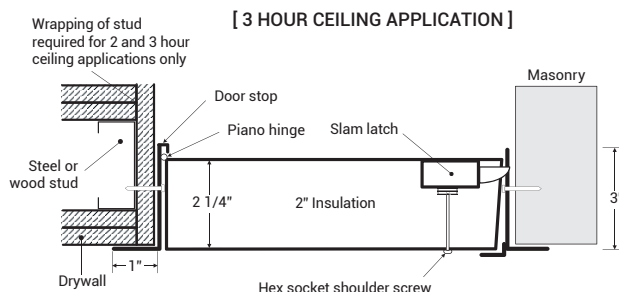

■ DIMENSIONS AND APPEARANCE


STANDARD SIZES:

DOOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
22 x 30 (558 x 762)	1	30	30.6
22 x 36 (558 x 914)	2	37	16.8
24 x 24 (609 x 609)	1	29	13.2

(Clear opening with door opened = W - 3 1/2")

ROUGH WALL OPENING IS DOOR SIZE + 1/4" or + 6mm

FIRE RATING INFORMATION ON PAGE 2

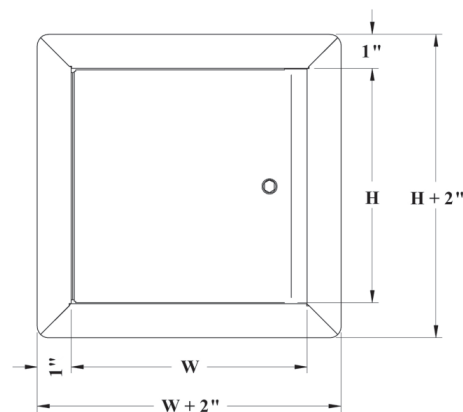

■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or  Click



BEST
ACCESS
DOORS

To view Pricing and
Additional Product Info.

LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@BestAccessDoors.com

■ FIRE RATING

FOR HORIZONTAL WALL ASSEMBLIES ONLY:

CERTIFIED TO STANDARDS: ASTM E119 (2012), CAN/ULC S101 (2007).

RATING ACHIEVED: 3 hours in non-combustible construction. 1 hour in combustible construction.

MAXIMUM SIZE: 24" x 36" (hinges & latch on 36" long sides) (610 mm x 914 mm).


Tolerances on dimension limitations are $\pm 3"$ (76 mm) as long as the area does not exceed 864 in².

TEMPERATURE RISE: Not applicable.


■ INSTALLATION: WALLS AND CEILINGS

Wrapping of stud
required for 2 and 3 hour
ceiling applications only

[3 HOUR CEILING APPLICATION]

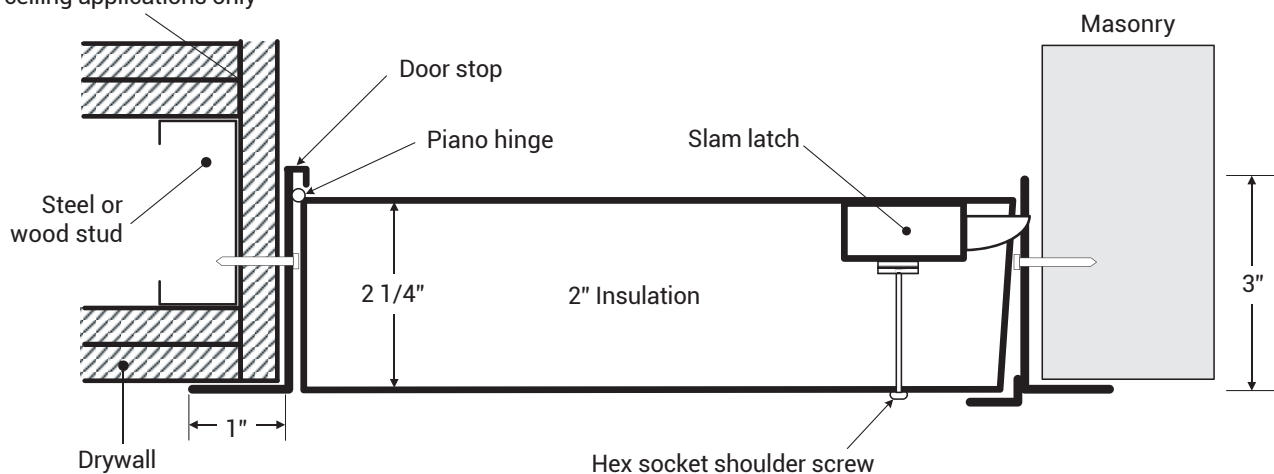

[1 HOUR CEILING APPLICATION]

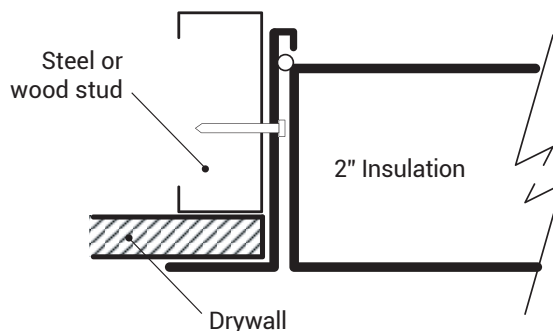

Authorities Having
Jurisdiction (AHJ) should
be consulted in all cases
as to the particular
requirements covering
the installation and use
of fire rated access doors



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVENUE
S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@BestAccessDoors.com