



Quality Access Doors- **FAST!**

DESCRIPTION

Not keen on the seam line showing up in your design? Then the Envisivent Permanent Air Return Vent is the perfect solution for your style. Meant to replace a standard vent cover for a 14" x 6" or 12" x 6" duct opening (if applicable) or wall cavity, and fits into a drywall opening of 16" x 10". A completely seamless look with no outer lines, creating a contemporary aesthetic that's perfect for any home, office or commercial space.

APPLICATION

- Designed to be installed with 1/2" thick drywall
- Install anywhere on a wall where there are duct openings (if applicable) both high (towards the ceiling) or low (towards the floor)
- Permanent installation - once installed the air return vent cannot be removed

FEATURES

- 18 straight horizontal slots
- Over 33 square inches (215 square cm) of open vent area
- Moisture, mold, and water resistant
- Machine-beveled outer edges for seamless finishing
- Primed and ready to paint
- Eco-friendly manufacturing and non-hazardous
- Vent Cover Material: Triple Fibre Reinforced Cement Board
- Designed to be installed with 1/2" or 5/8" thick drywall

SPECIFICATIONS


- Mud-in/ Tapeable Air Return Vent for duct opening (if applicable) size 14" x 6"
- Overall Dimensions: 16" x 10" x 0.5"
- Vented Opening Dimensions: 12" x 6"
- Fits into a Drywall Opening of 16.25" x 10.25"
- Each slot size - 5.805" x 0.32"
- 18 straight horizontal vent slots
- Over 33 square inches of open vent area

For a complete list of options visit
www.BestAccessDoors.com

SUBMITTAL/TECHNICAL DATA SHEET



SKU: **BA-IG-CA14X6**

PERMANENT MUD-IN FLUSH MOUNT WALL AIR RETURN

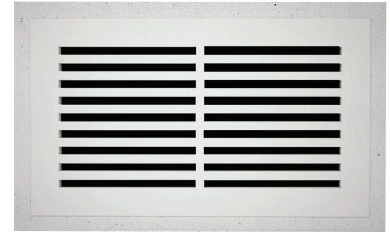

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

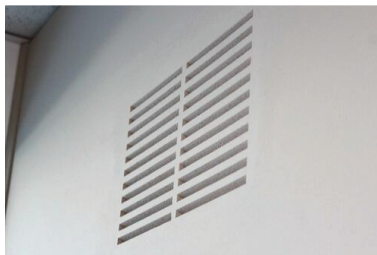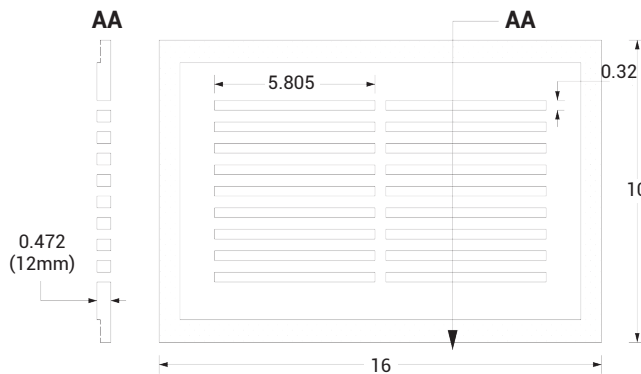

Material Information:

Raw Material: Cement, fibres, quartz sand, nonhazardous fillers
Density: 1.0<D ≤1.2 g/cm³
Asbestos Content: 100% asbestos-free
Fire resistance: non-combustible
Water Absorption: ≤40%
Resistant Bending Strength: ≤10.5 MPa dry
Moisture Movement - 0.25 %
Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or  Click



To view Pricing and
Additional Product Info.

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com