



Quality Access Doors- **FAST!**

## DESCRIPTION

A premium flush mount cold air return cover which replaces the cover for a 14"x8" opening. This cover fits into the drywall opening of 13.875"x11.5" and has a vented/slotted area of 12"x8.75". This item is taller to maximize air flow while fitting between 2 studs.

## APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for low and high wall installations.
- Not suitable for ceiling install (call for ceiling option).
- Combine with DMP14 for vent dampering and shut off.
- Rough-in's available for new builds and major renovations.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

## FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled vent slots for directional venting.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

## SPECIFICATIONS

- Over 47.4 square inches (305.8 square centimeters) of open area.
- Slot Size: 0.32" x 5.7" (8mm x 145mm).
- 26 angled horizontal slots.
- Slot Angle - 20 degrees-Overall dimensions are 16" x 13.625" x0.5"(406mm x 346mm x 12mm).
- Product weight is 2.2 pounds (1 kilogram)

For a complete list of options visit  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)

# SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-IG-MAG-C14DMP**


## WALL COLD AIR RETURN COVER

REMOVABLE AND MAGNETIC



## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

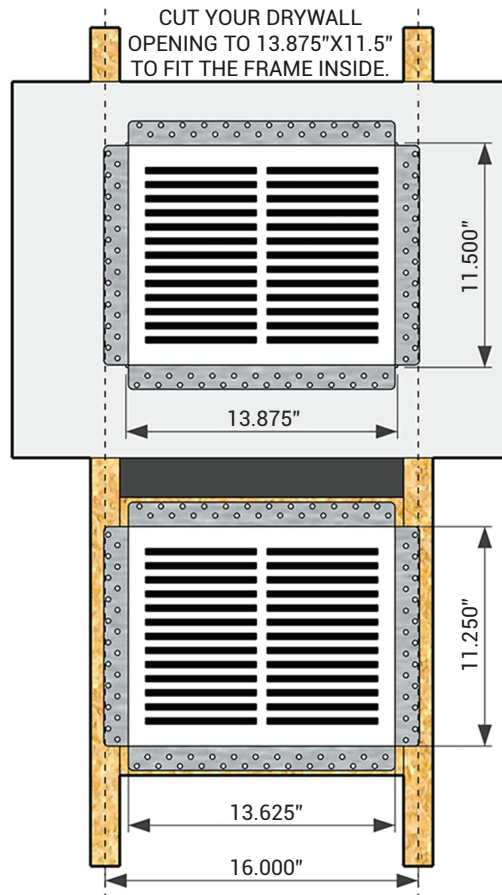


### MATERIAL INFORMATION:

Raw Material: cement, fibres, quartz sand, non-hazardous fillers.  
Density: 1.0< D ≤1.2 g/cm3  
Asbestos Content: 100% asbestos-free  
Fire resistance: non-combustible  
Water Absorption: ≤40%  
Resistant Bending Strength: ≤10.5 MPa dry  
Moisture Movement: 0.25 %  
Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .

### NOTES

THIS MODEL INCLUDES A DUMPER

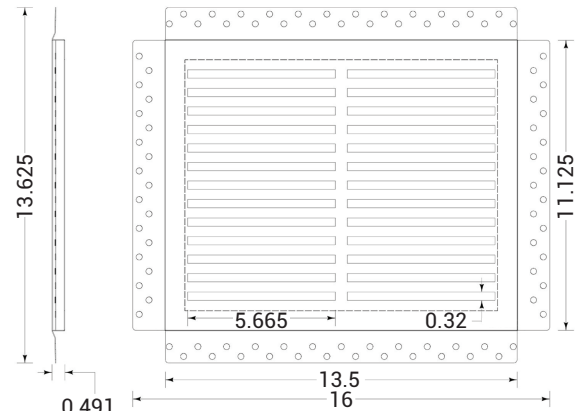

## PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and  
Additional Product Info.

|                        |                                              |   |   |         |
|------------------------|----------------------------------------------|---|---|---------|
| PROJECT NAME :         | QTY                                          | W | H | OPTIONS |
| ARCHITECT :            |                                              |   |   |         |
| DEALER :               |                                              |   |   |         |
| CONTRACTOR :           |                                              |   |   |         |
| LOCATION :             | SPECIAL INSTRUCTIONS :                       |   |   |         |
| DATE :                 | SUBMITTAL APPROVAL :<br>(signature or stamp) |   |   |         |
| TAGGING INSTRUCTIONS : |                                              |   |   |         |

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)