



Quality Access Doors - **FAST!**

# SUBMITTAL/TECHNICAL DATA SHEET

## DESCRIPTION

Clean and classic, featuring a completely removable front that utilizes magnetic technology. The Envisivent Removable Air Return Vent creates a smooth design for a more contemporary aesthetic, without the bulk of plastic or the hindrance of using visible screws. Meant to replace a vent cover for a 14" x 24" duct opening (if applicable) or wall cavity and fits into a 16" x 26" drywall opening.

## APPLICATION

- Designed to be installed with 1/2" or 5/8" thick drywall
- Install anywhere on a wall where there are duct openings (if applicable) or wall cavity both high (towards the ceiling) or low (towards the floor)

## FEATURES

- Two rows of 34 straight horizontal slots, totaling 68 slots
- Over 124 square inches (800 square cm) of open vent area
- 4 magnetic tabs on the vent cover for easy removal
- Metal frame screws onto the face of your drywall
- Moisture, mold, and water resistant
- Primed and ready to paint
- Eco-friendly manufacturing and non-hazardous
- Frame Material: Satin Coat Galvanized Steel
- Vent Cover Material: Triple Fibre Reinforced Cement Board
- Designed to be installed with 1/2" or 5/8" thick drywall

## SPECIFICATIONS

- Removable Flush Mount Air Return Vent Cover for duct opening size 14" x 24" (if applicable) or wall cavity
- Fits into a drywall opening of 26" x 16"
- Overall Dimensions: 18.375" x 28.375" x 0.5"
- Vent Cover Dimensions: 15.875" x 25.875"
- Vented Opening Dimensions: 13.749" x 23.75"

For a complete list of options visit  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)



SKU: **BA-IG-MAG-C14X24**

## ENVISIVENT REMOVABLE MUD-IN FLUSH MOUNT AIR RETURN



## DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

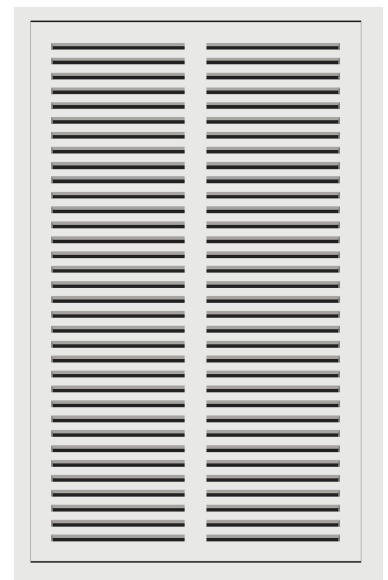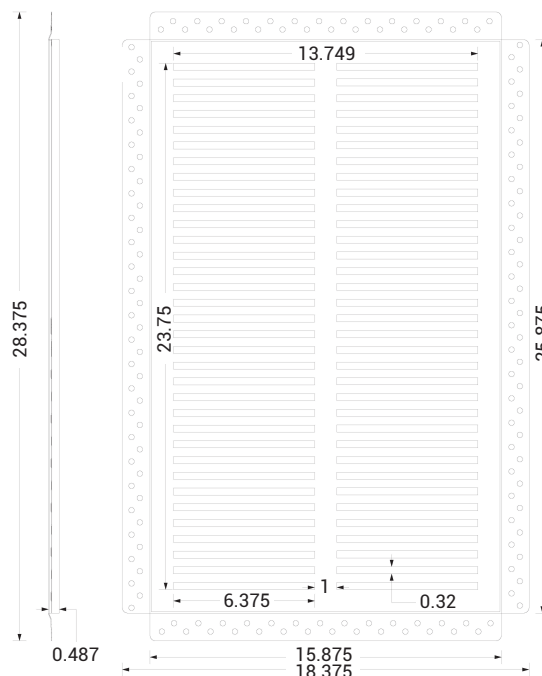

### PRODUCT SPECIFICATIONS:

- Each slot size is 8.375" x 0.32"
- 68 straight horizontal vent slots
- Over 124 square inches (799.99 square cm) of open vent area

### MATERIAL INFORMATION:

**Raw Material:** Cement, fibres, quartz sand, nonhazardous fillers  
**Density:** 1.0<D ≤1.2 g/cm<sup>3</sup>  
**Asbestos Content:** 100% asbestos-free  
**Fire resistance:** non-combustible  
**Water Absorption:** ≤40%  
**Resistant Bending Strength:** ≤10.5 MPa dry  
**Moisture Movement:** 0.25 %  
**Freeze Thaw:** No distortion after 25 repeated cycles of freezing and thawing.

## PROJECT DATA

Custom Sizes Available - Fast!

Scan or



To view Pricing and  
Additional Product Info.

|                        |                                              |   |   |         |
|------------------------|----------------------------------------------|---|---|---------|
| PROJECT NAME :         | QTY                                          | W | H | OPTIONS |
| ARCHITECT :            |                                              |   |   |         |
| DEALER :               |                                              |   |   |         |
| CONTRACTOR :           |                                              |   |   |         |
| LOCATION :             | SPECIAL INSTRUCTIONS :                       |   |   |         |
| DATE :                 |                                              |   |   |         |
| TAGGING INSTRUCTIONS : | SUBMITTAL APPROVAL :<br>(signature or stamp) |   |   |         |

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)