



Quality Access Doors- **FAST!**

## DESCRIPTION

Sleek and timeless, the Envisivent Removable Air Return Vent creates a modern touch with its fully detachable front, made easy by magnetic technology. This design innovation ensures a seamless appearance, free from the bulk of traditional plastic covers or the distraction of visible screws.

## APPLICATION

- Designed to be installed with 1/2" or 5/8" thick drywall.
- Install anywhere on a wall where there are duct openings (if applicable)/or wall cavity both high (towards the ceiling) or low (towards the floor).

## FEATURES

- Magnetic Removable Impact Resistant Triple Fibre Reinforced Cement Board Vent Cover
- Primed vent cover ready to accept paint
- 24 gauge galvanized satin coat steel frame
- 4 magnetic tabs on Vent Cover for easy removal
- Made of non-flammable materials
- Moisture, mold, and water resistant

## SPECIFICATIONS


- Removable Flush Mount Air Return Vent Cover for duct opening size 30" x 14" (if applicable)/or wall cavity
- Fits into a drywall opening of 32" x 16"
- Overall Dimensions: 18.375" x 34.375" x 0.5"
- Vent Cover Dimensions: 15.875" x 31.875"
- Vented Opening Dimensions: 30" x 14"
- Each slot size is 6.406" x 0.32"
- 80 straight horizontal vent slots
- Over 155 square inches (999.99 square cm) of open vent area

For a complete list of options visit  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)

# SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-IG-MAG-C30X14**

## REMOVABLE MUD-IN FLUSH MOUNT AIR RETURN

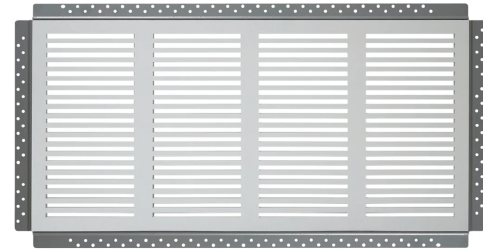

## DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

### MATERIAL INFORMATION:

**Raw Material:** Cement, fibres, quartz sand, nonhazardous fillers

**Density:**  $1.0 < D \leq 1.2 \text{ g/cm}^3$

**Asbestos Content:** 100% asbestos-free



**Fire resistance:** non-combustible

**Water Absorption:**  $\leq 40\%$

**Resistant Bending Strength:**  $\leq 10.5 \text{ MPa}$  dry

**Moisture Movement:** 0.25 %

**Freeze Thaw:** No distortion after 25 repeated cycles of freezing and thawing.

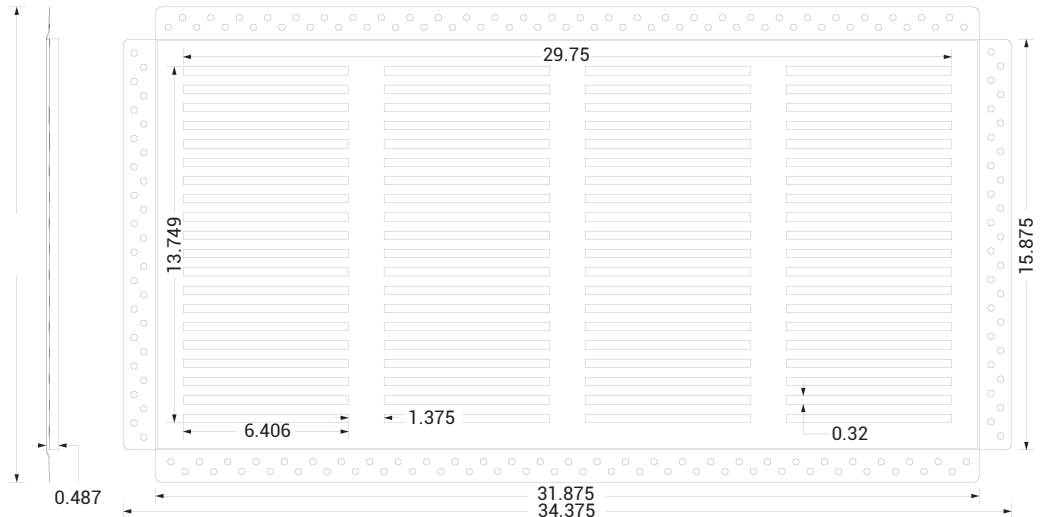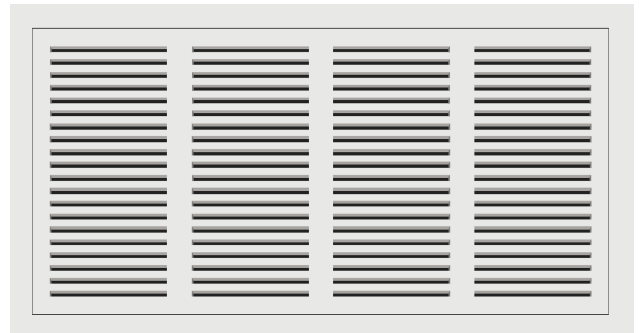

## PROJECT DATA

Custom Sizes Available - Fast!

|                        |                                              |   |   |         |
|------------------------|----------------------------------------------|---|---|---------|
| PROJECT NAME :         | QTY                                          | W | H | OPTIONS |
| ARCHITECT :            |                                              |   |   |         |
| DEALER :               |                                              |   |   |         |
| CONTRACTOR :           |                                              |   |   |         |
| LOCATION :             | SPECIAL INSTRUCTIONS :                       |   |   |         |
| DATE :                 | SUBMITTAL APPROVAL :<br>(signature or stamp) |   |   |         |
| TAGGING INSTRUCTIONS : |                                              |   |   |         |

Scan  or  Click



To view Pricing and  
Additional Product Info.

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)