



Quality Access Doors- **FAST!**

DESCRIPTION

A premium flush mount supply vent cover for a 3"x10" duct. Complete with diffuser flaps to control your air flow, this cover fits into the drywall opening of 4"x11" and has a vented/slotted area of 2"x9".

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Rectangular straight vent slots.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

SPECIFICATIONS

- Over 6.76 square inches (43.61 square centimeters) of open area.
- Slot Size: 0.26" x 2" (6.6mm x 50.8mm).
- 13 rectangular straight vertical slots.
- Overall dimensions are 13.5" x 6.5" x 0.5" (343mm x 165.1mm x 12mm).
- Product weight is 1.21 pounds (0.55 kilograms)


For a complete list of options visit
www.BestAccessDoors.com

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-IG-MAG-S3X10**

WALL AND CEILING SUPPLY VENT

REMOVABLE AND MAGNETIC

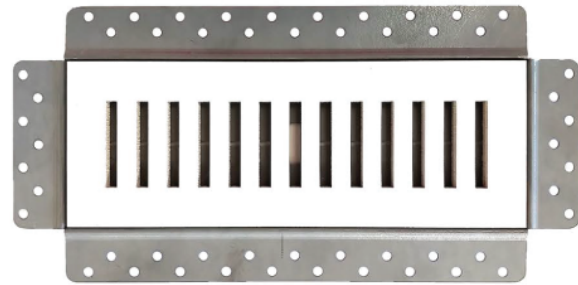

DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

MATERIAL INFORMATION:

Raw Material: Cement, fibres, quartz sand, nonhazardous fillers

Density: 1.0<D ≤1.2 g/cm³

Asbestos Content: 100% asbestos-free


Fire resistance: non-combustible

Water Absorption: ≤40%

Resistant Bending Strength: ≤10.5 MPa dry

Moisture Movement: 0.25 %

Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing.

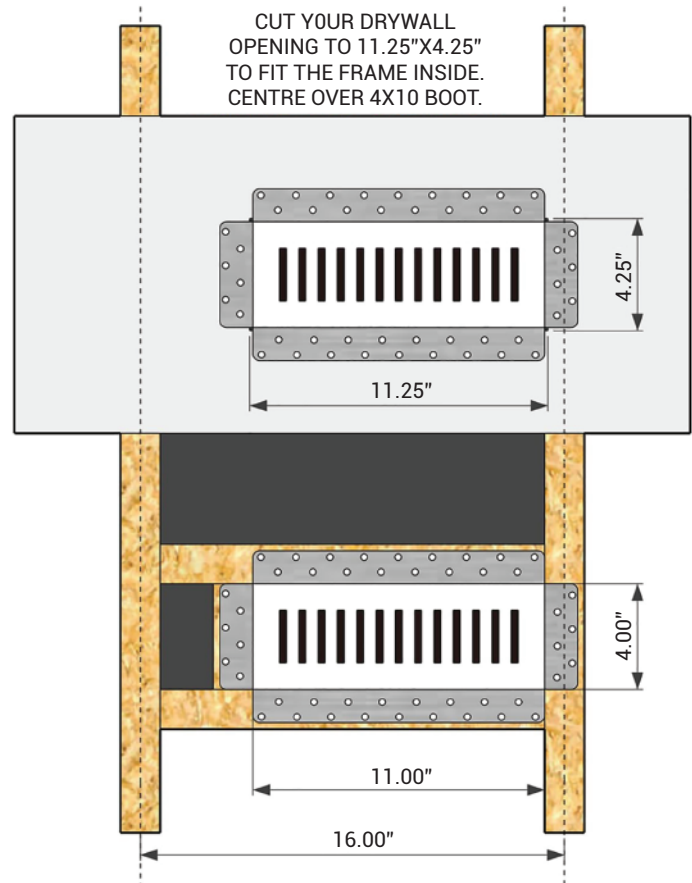

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or  Click



To view Pricing and
Additional Product Info.

TELEPHONE:

1-800-483-0823

FAX:

1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:

www.BestAccessDoors.com

E-MAIL:

info@bestaccessdoors.com

BA-IG-MAG-S3X10

REMOVABLE AND MAGNETIC
WALL AND CEILING SUPPLY VENT

AIRFLOW DATA

			Core Velocity (FPM)	300	400	500	600	700	800	1000	1200	1400
Opening Width (in.)	Opening Height (in.)	Core Area (ft²)	Core Velocity Pressure ("wc)	0.006	0.010	0.016	0.022	0.030	0.040	0.062	0.090	0.122
9	2	0.125	Flow (CFM)	33	45	56	67	78	89	111	134	156
			Static Pressure ("wc)	0.025	0.045	0.070	0.100	0.136	0.178	0.279	0.401	0.546
			Throw (ft) (150 100 50)	3 5 12	4 7 16	5 9 20	6 10 24	7 12 28	8 14 33	17 41	13 21 49	15 24 57

