



Quality Access Doors- **FAST!**

DESCRIPTION

A premium flush mount access panel cover for a 6"x6" drywall opening. This cover can also be used on a wall or ceiling and yields a 4.125"x4.125" accessible area.

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board cover.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco- Friendly Manufacturing and Non-Hazardous.

SPECIFICATIONS

- Over 17.01 square inches (109.7 square centimeters) of open area.
- Overall dimensions are 8.125" x 8.125" x 0.5" (206.37mm x 206.37mm x 12mm).
- Product weight is 1.43 pounds (0.65 kilograms)

For a complete list of options visit
www.BestAccessDoors.com

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-IG6**



ACCESS PANEL COVER

REMOVABLE & MAGNETIC



DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

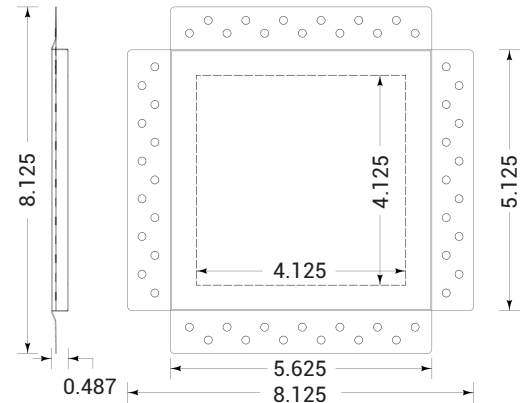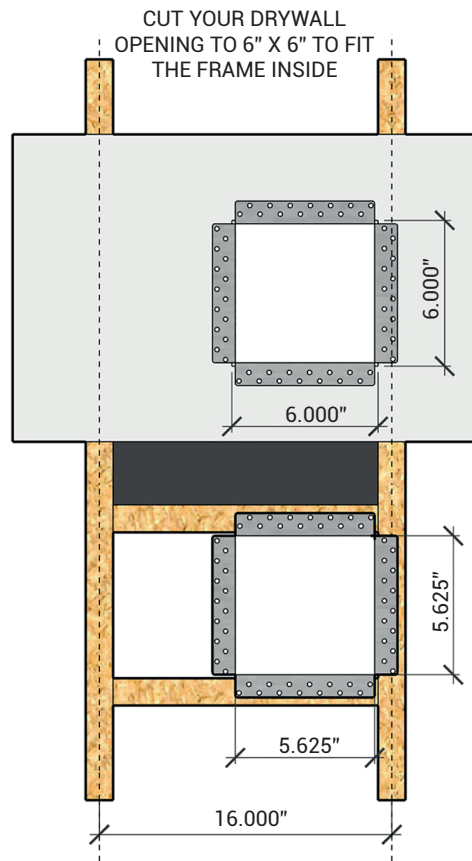

Material Information:

Raw Material: Cement, fibres, quartz sand, non- hazardous fillers.
Density: 1.0<D ≤ 1.2 g/cm3
Asbestos Content: 100% asbestos-free
Fire resistance: Non-combustible edge and adjustable diffuser.
Water Absorption: ≤40%
Resistant Bending Strength: ≤10.5 MPa dry
Moisture Movement: 0.25 %
Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com