



Quality Access Doors- **FAST!**

DESCRIPTION

The access panel consists of a welded aluminum frame and is available with 1/2" (12.7 mm) or 5/8" (15.9 mm) inlayed drywall and two latches.

Both an outer and an inner frame assembly consists of high grade aluminum which is bonded with a special welding process.

For sizes 12" x 12" (305 mm x 305 mm) and up the access panels are equipped with a safety system to prevent accidental opening. This safety system must be reattached if the hatch is removed.

The reveal of 1/16 of an inch (1.59 mm) is visible between the outer frame and door hatch. The concealed snap locks open the access panel when pressure is applied to the spring loaded latch side.

ADVANTAGE

- Superior engineering & innovative design
- Fast delivery
- Quick and easy installation
- Solid aluminum frame
- Flush installation in ceilings and walls
- Available in moisture / mildew resistant green board and cement board

OPTIONS

- Screwdriver operated cam latch
- Screwdriver operated four-square cam latch
- Round Cylinder Lock with Key
- Mortise Cylinder Lock Preparation
- Hex Head Cam Latch
- Pinned Hex Head Cam Latch

CUSTOMIZED SOLUTIONS

Customized sizes can be produced in every dimension upon request.

Drywall insert with screws on larger sizes than 24" x 24" (610 mm x 610 mm).


For a complete list of options visit
www.BestAccessDoors.com

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-IVHFH**

DRYWALL INLAY PANEL WITH FIXED HINGES

INVISIA HATCH™

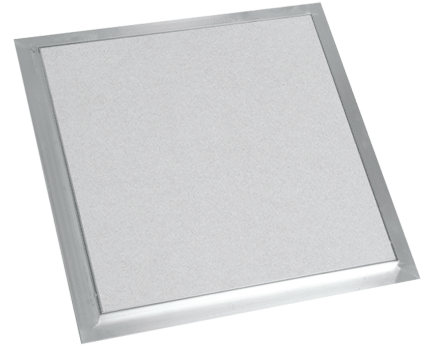


DIMENSIONS AND APPEARANCE



>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

STANDARD SIZES:

System F1	Dimensions	
CODE	A inch mm	B inch mm
203203G127	8" 203	8" 203
305305G127	12" 305	12" 305
406406G127	16" 406	16" 406
508508G127	20" 508	20" 508
610610G127	24" 610	24" 610

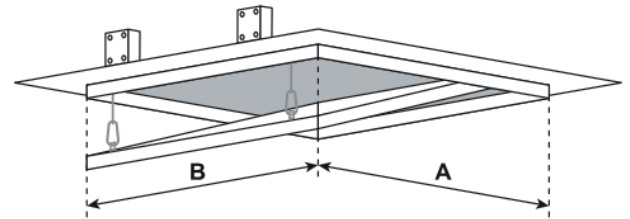

All standard sizes are available in 1/2" (12.7 mm) or 5/8" (15.9 mm) drywall.



For detailed specifications see submittal sheet

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or 



To view Pricing and
Additional Product Info.



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003





WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-IVHFFH

INVISA HATCH™ DRYWALL INLAY PANEL WITH FIXED HINGES

NOMINAL DOOR SIZE	A	B	C	D	E	F	LOCK
Inches (mm)							
8 x 8 (305 x 305)	8.00 (203)	8.00 (203)	10.20 (258)	10.20 (258)	8.14 (207)	8.14 (207)	2
12 x 12 (305 x 305)	12.00 (305)	12.00 (305)	14.20 (359)	14.20 (359)	12.14 (308)	12.14 (308)	2
16 x 16 (406 x 406)	16.00 (406)	16.00 (406)	18.20 (461)	18.20 (461)	16.14 (410)	16.14 (410)	2
18 x 18 (457 x 457)	18.00 (457)	18.00 (457)	20.20 (512)	20.20 (512)	22.14 (461)	22.14 (461)	2
20 x 20 (508 x 508)	20.00 (508)	20.00 (508)	22.20 (562)	22.20 (562)	20.14 (512)	20.14 (512)	2
24 x 24 (610 x 610)	24.00 (610)	24.00 (610)	26.20 (664)	26.20 (664)	24.14 (613)	24.14 (613)	2
24 x 36 (610 x 915)	24.00 (610)	36.00 (915)	26.20 (664)	38.20 (969)	24.14 (613)	36.14 (919)	2

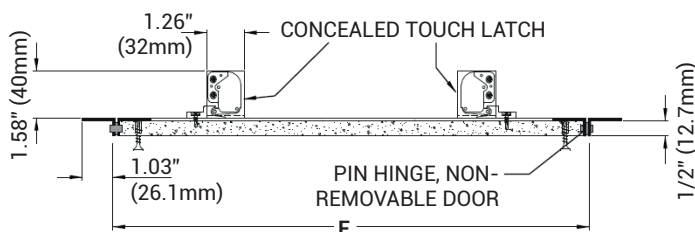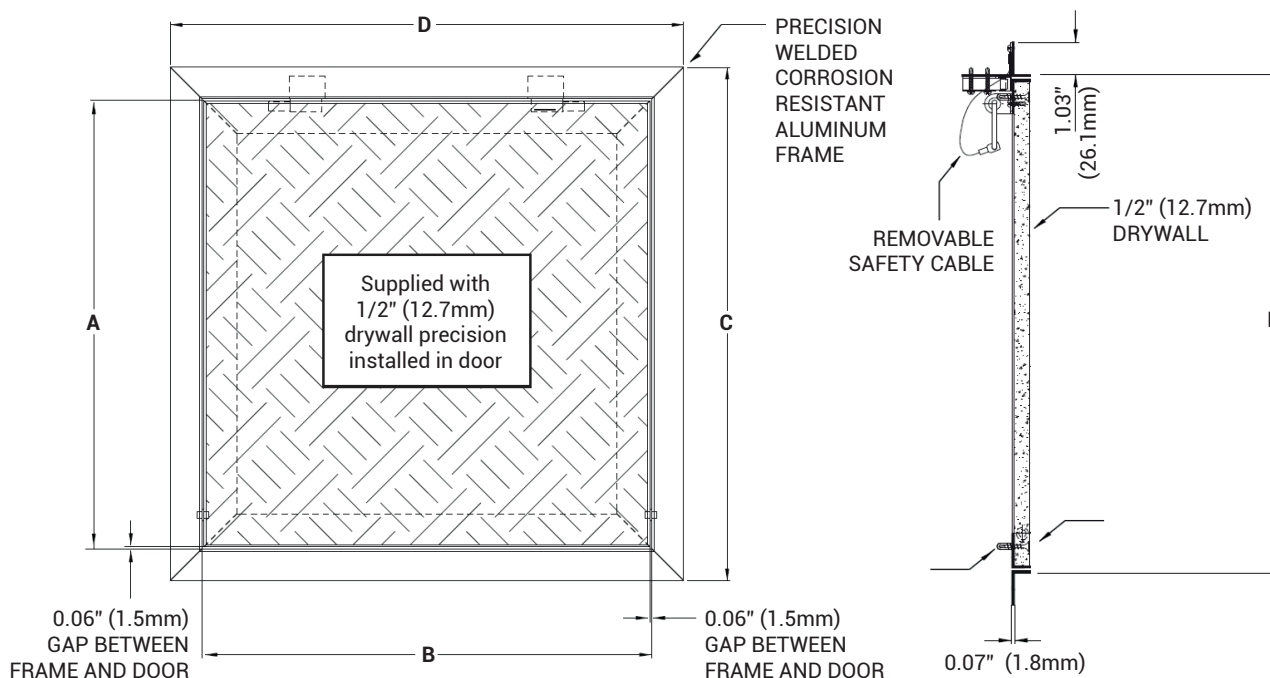

ROUGH OPENING IS NOMINAL SIZE + 3/8" (9mm).
DRYWALL INSERT WITH SCREWS ON SIZES LARGER THAN
24" X 24" (610mm X 610mm)

ADDITIONAL LOCK OPTIONS AVAILABLE,
BUT NOT ALL SHOWN.

OPTIONAL ROUND
CYLINDER LOCK
WITH KEY
(ALL KEYED ALIKE)

OPTIONAL
SCREWDRIVER
OPERATED
CAM LATCH

