



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

STANDARD OPTIONS

MATERIAL:

DOOR: Aluminum diamond plate 1/4"
(6.35 mm)

FRAME: 2" x 2" x 1/4" aluminum angle

HINGE:

Heavy duty aluminum continuous
piano hinge (0.080").

Note: Hinge on second dimension
(Height)

LOCK / LATCH:

4" removable handle

RECESS:

1/4" standard

OPTIONS AVAILABLE

RECESS:

1/8", 3/8", 1/2" and 3/4"

CAUTION:

The BA-RAFL floor access door is
designed to support a live load of 300
pounds/sq.foot and includes a hold
open arm to keep the door in an open
position


SKU: **BA-RAFL**

RECESSED ALUMINUM FLOOR HATCH



INSTALLATION

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

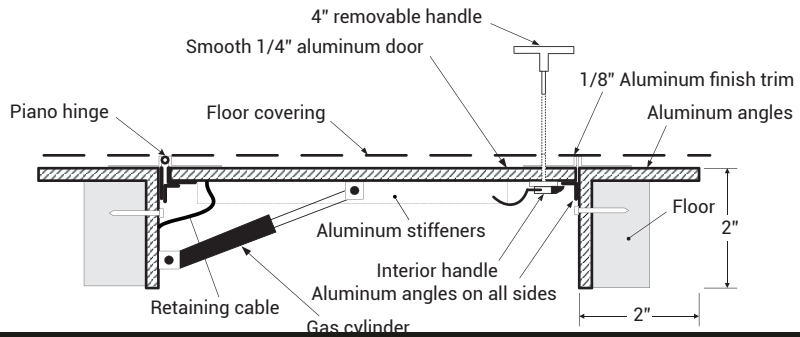

DIMENSIONS AND APPEARANCE

For a complete list of options visit
www.BestAccessDoors.com

Scan or Click




**BEST
ACCESS
DOORS**

To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**

HATCH SIZE - W x H INCHES (mm)	NUMBER OF LOCKS	WEIGHT LBS KG	
24 x 24 (609 x 609)	1	35	15.9
24 x 36 (609 x 914)	1	44	20

ROUGH FLOOR OPENING IS DOOR SIZE + 1/2" or + 13mm

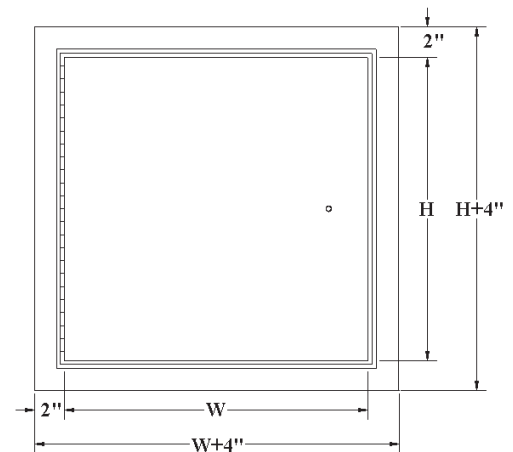

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com