



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

Domed smoke vents provide natural daylighting where smoke vents are installed. These smoke vents with a UL-listed fusible link, automatically open during a fire, releasing fumes and smoke.

SPECIFICATIONS

MATERIAL: Curb is 14 gauge galvanneal steel, and cover is extruded aluminum with acrylic dome.

FINISH: Silver textured powder coat paint.

DOMES: Clear over white acrylic domes

GASKETING: Bulb neoprene door seal.

INSULATION: 1" polyisocyanurate (R-6) on curb and in cover.

HINGES: Heavy-duty aluminum hinge with bolt pin.

HOLD-OPEN ARM: Clear zinc-plated steel hold-open arm with red plastic coating.

LATCHES: Fully enclosed automatic pull release latch unit-typical each end.

FUSIBLE LINK: 165° UL-Listed Fusible Link.

SPRING: Torsion spring drives open the covers automatically. Shock absorbers control the speed of the leaves as they open

SIZES:
Minimum - 48" x 48".
Maximum - 48" x 96" or 72" x 96"


CLEAR OPENING: Minus 8" on width and minus 8" on length.

ROOF OPENING = ORDER SIZE

SKU: **BA-RV-FV**

DOMED SMOKE VENTS

FAHRENHEIT™ VIEW SERIES

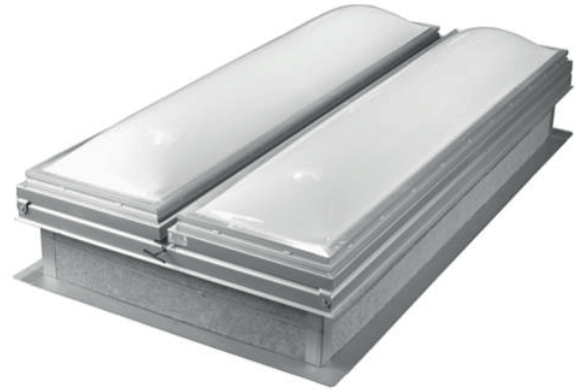

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:





MODEL	PREVIOUS MODEL		CURB OPENING L X W
	JL	DUR-RED	
RVFVGA-4848ST	UDFV-1	FSHDD-4848	48" x 48"
RVFVGA-4872ST	UDFV-2	FSHDD-4872	48" x 72"
RVFVGA-4890ST	UDFV-3	FSHDD-4890	48" x 90"
RVFVGA-4896ST	UDFV-4	FSHDD-4896	48" x 96"
RVFVGA-6060ST	UDFV-5	FSHDD-6060	60" x 60"
RVFVGA-6096ST	UDFV-6	FSHDD-6096	60" x 96"
RVFVGA-7296ST	-	FSHDD-7296	72" x 96"

FINISH:

• ST - Powder Coat Silver Texture

OPTIONS:

- CD - Double Wall Curb
- CM - Curb Mount
- IT - 2" Polyiso Insulated Curb
- ITT - 2" Polyiso Insulation on Curb & Cover
- L1LO - 24VDC McCabe Link, 165°F
- L2NO - Link, 212°F
- VPCW - Double Polycarbonate Clear over White Dome
- VAW - Acrylic Single Dome White

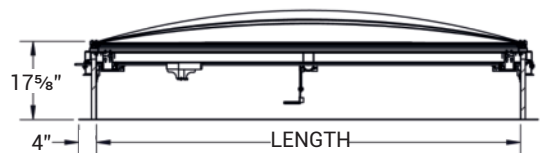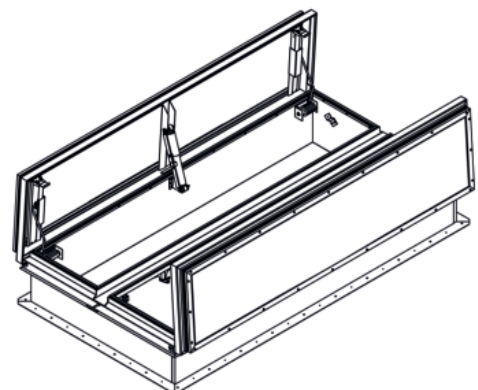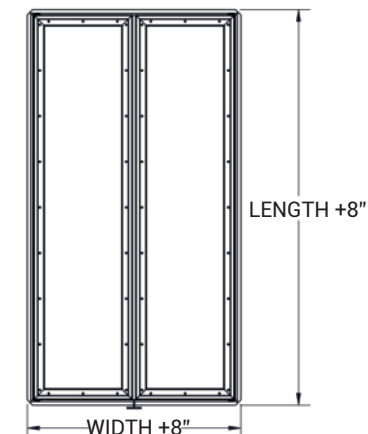

For a complete list of options visit
www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com