



Quality Access Doors - FAST!

APPLICATION

For standard 1-3/4" door thickness and glazing thickness 3/16"-1 11/16". VLLPB-G's are also used for custom 1"-3" door thickness.

SPECIFICATIONS

APPLICATION: For door thickness 1"-3" and glazing thickness 3/16" - 1-11/16". Must specify both:

Door Thickness: _____

Glazing Thickness: _____

For 1-3/4" door with glazing thickness of 3/16"-5/16" see VLLP

FRAME MATERIAL: 20 gauge cold rolled steel

STANDARD FINISH: Mineral bronze powder coat

FASTENERS: #8A Flathead Phillips SMS to match finish

SIZE:

Minimum: 4" x 4"

Maximum: 48" x 90"

Door Cutout = Order Size (W x H)

Glazing Size = Order Size minus 1"

(W - 1" x H - 1")

Exposed Glazing = Order Size minus 2"

(W - 2" x H - 2")

PROTRUSION: For glazing thickness that is within 3/4" of the door thickness or thicker, frame will not be flush, Protrusion ranges from .11 - .84 .

FIRE RATINGS

UL listed and labeled/stamped to ANSI/UL 10B, ANSI/UL 10C and CAN/ULC S104 when properly installed in rated and approved door. Ratings up to 180 minutes can be achieved depending on exposed glazing size and area


For a complete list of options visit www.BestAccessDoors.com

TECHNICAL DATA SHEET

SKU: **BA-VLLPB-G**

LOW PROFILE VISION LITES

SLIMLINE SERIES

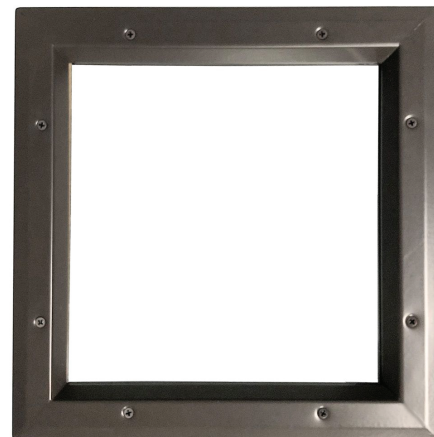


DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

STANDARD SIZES:

MODEL	ROUGH OPENING	MODEL	ROUGH OPENING	COLOR	GLAZING THICKNESS	DOOR DEPTH
VLLPB 1212G 01	12" x 12"	VLLPB 0722G 01	7" x 22"	Gray	1"	1-3/4"
VLLPB 0535G 01	5" x 35"	VLLPB 2430G 01	24" x 30"			
VLLPB 0624G 01	6" x 24"	VLLPB 2436G 01	24" x 36"			
VLLPB 0627G 01	6" x 27"	VLLPB 2460G 01	24" x 60"			

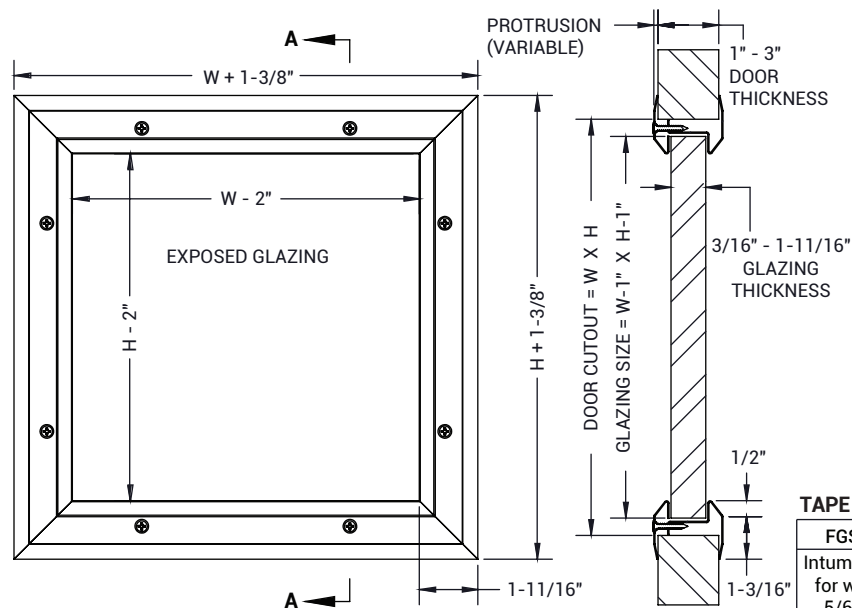

For detailed specifications see submittal sheet

SECTION A-A

OPTIONS

MATERIALS: 20 gauge 304 Stainless steel, galvanized steel, zinc-plated steel

MULLIONS: or 1-3/4" Doors Only - 1" x 5/8" welded-on, formed mullions for a divided lite look that uses one (1) pane of glass

PAKS: Vision lite, glazing & glazing tape combined

COMPATIBLE AIR

LOUVERS GLAZING:

Fire-Rated: PPF, FL, FLP, WS, PPL

Non-Rated: TEMP, ARM 1, ARM2, ARM3, BRG1

OTHER: Torx screws

TAPE WHEN SOLD SEPARATELY

FGS3000S90	GTAPE 200B
Intumescent tape for wired glass 5/64" thick x 7/16" wide x 16 ft	Standard glazing tape 1/16" 1/16" thick x 3/8" wide x 200 ft

PROJECT DATA

Custom Sizes & Options Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or



To view Pricing and Additional Product Info.

TELEPHONE:

1-800-483-0823

FAX:

1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:

www.BestAccessDoors.com

E-MAIL:

info@bestaccessdoors.com