



Quality Access Doors - FAST!

TECHNICAL DATA SHEET

DESCRIPTIONS

Low profile, hem-strengthened Slimline vision lites mount flush to the door with self-attaching, single-sided fasteners. A minimal 1/8" protrusion provides a clean, aesthetic look. VLLP models are for standard door thickness 1-3/4" and glazing thickness 3/16" - 5/16".

SPECIFICATIONS

APPLICATION: For door thickness 1-3/4" and glazing thickness 3/16" - 5/16"

FRAME MATERIAL: 20 gauge cold rolled steel

STANDARD FINISH: Mineral bronze powder coat

FASTENERS: #8A x 1-1/4" Flathead Phillips screws to match finish

SIZE:
Minimum: 4" x 4"
Maximum: 48" x 90"
Door Cutout = Order Size (W x H)
Glazing Size = Order Size minus 1" (W - 1" x H - 1")
Exposed Glazing = Order Size minus 2" (W - 2" x H - 2")

OPTIONS

MATERIALS: 20 gauge 304 Stainless steel, galvanized steel, zincplated steel

MULLIONS: 1" x 5/8" welded-on, formed mullions for a divided lite look that uses one (1) pane of glass

PAKS: Vision lite, glazing, and glazing tape combined

COMPATIBLE AIR LOUVERS

GLAZING:
Fire-Rated: PPF, FL, FLP, FGL WS
Non-Rated: TEMP


OTHER: Torx screws

For a complete list of options visit
www.BestAccessDoors.com

SKU: **BA-VLLPB-TMP**

LOW PROFILE VISION LITES

SLIMLINE SERIES

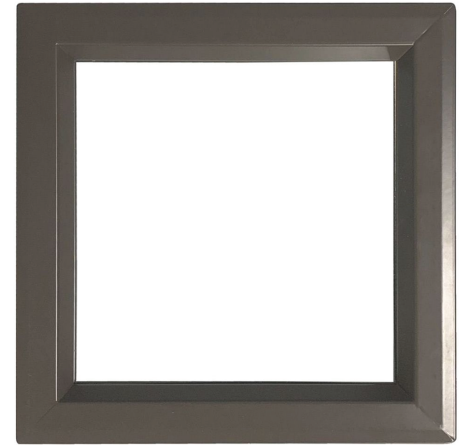


DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

VLLPB PAKS: VISION LITE + GLAZING + TAPE APPLIED:

MODEL	ROUGH OPENING	COLOR	GLAZING	FIRE-RATING
VLLP-1212B TEMP PAK	12" x 12"	Bronze	Tempered Glass	Non Fire Rated
VLLP-0535B TEMP PAK	5" x 35"			
VLLP-0627B TEMP PAK	6" x 27"			
VLLP-0722B TEMP PAK	7" x 22"			
VLLP-0832B TEMP PAK	8" x 32"			
VLLP-0836B TEMP PAK	8" x 36"			
VLLP-2424B TEMP PAK	24" x 24"			
VLLP-2430B TEMP PAK	24" x 30"			
VLLP-2432B TEMP PAK	24" x 32"			
VLLP-2436B TEMP PAK	24" x 36"			
VLLP-2460B TEMP PAK	24" x 60"			
VLLP-2464B TEMP PAK	24" x 64"			


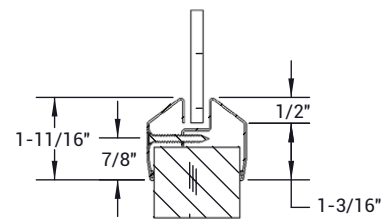


For detailed specifications see submittal sheet

FIRE RATINGS:

UL listed and labeled/stamped to ANSI/UL 10B, ANSI/UL 10C and CAN/ULC S104 when properly installed in rated and approved door. Ratings up to 180 minutes can be achieved depending on exposed glazing size and area.

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.

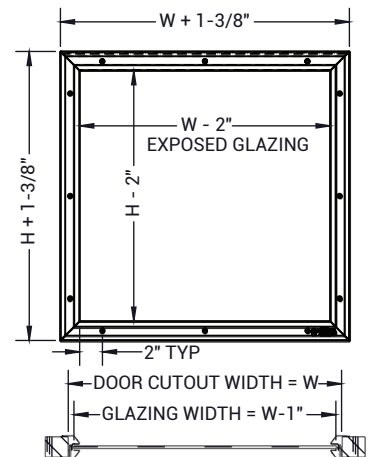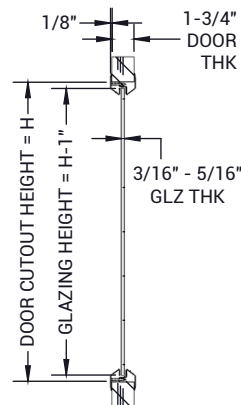

PROJECT DATA

Custom Sizes & Options Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or



To view Pricing and Additional Product Info.



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com