



Quality Access Doors- **FAST!**

## DESCRIPTION

A premium flush mount access panel cover for a 20"x20" drywall opening. This cover can also be used on a wall or ceiling and yields a 18.375"x18.375" accessible area.

## APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

## FEATURES

- Magnetic removable triple fibre reinforced cement board cover.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.375" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 Degree angled slots for directional venting and to hide a fan.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco- Friendly Manufacturing and Non-Hazardous.

## SPECIFICATIONS

- Over 337.64 square inches (2178.31 square centimeters) of accessible area.
- Overall dimensions are 22.375" x 22.375" x 0.5" (568.3mm x 568.3mm x 12mm).
- Product weight is 3.6 pounds (1.64 kilograms)


For a complete list of options visit  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)

# SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-IG20**



**ACCESS PANEL COVER**

REMOVABLE & MAGNETIC

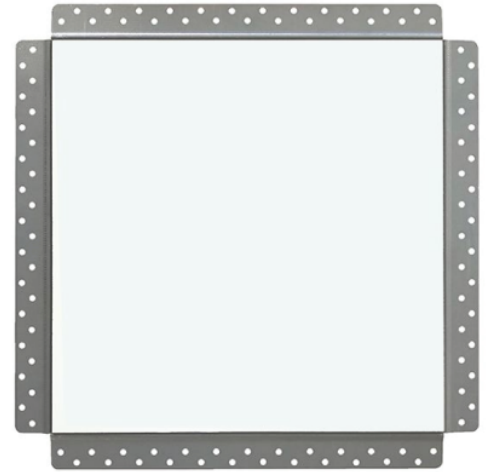

## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

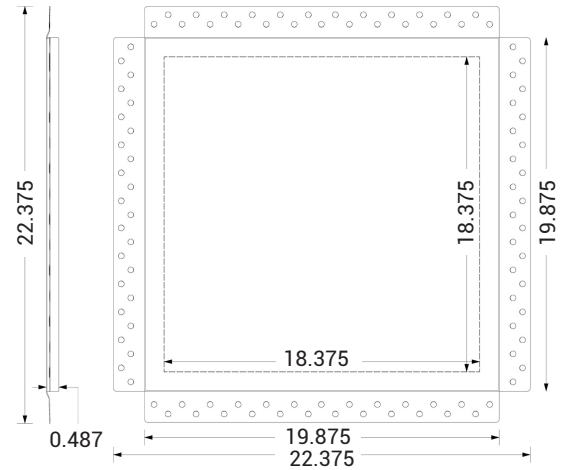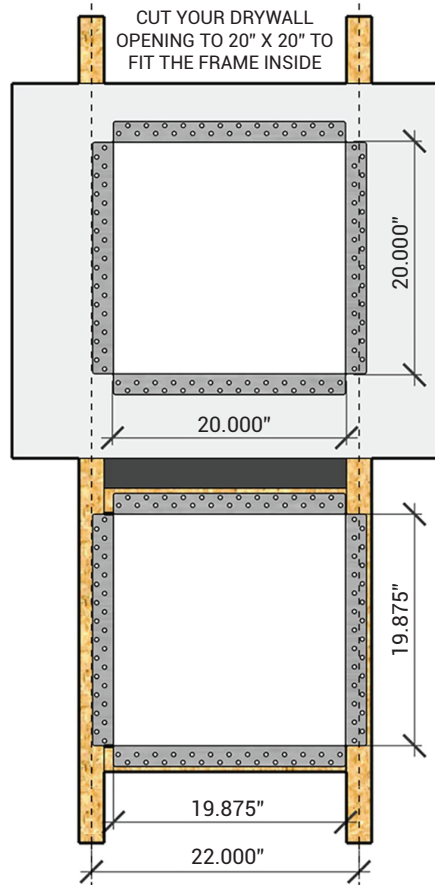

### Material Information:

**Raw Material:** Cement, fibres, quartz sand, non- hazardous fillers.

**Density:**  $1.0 < D \leq 1.2 \text{ g/cm}^3$

**Asbestos Content:** 100% asbestos-free

**Fire resistance:** Non-combustible edge and adjustable diffuser.

**Water Absorption:**  $\leq 40\%$

**Resistant Bending Strength:**  $\leq 10.5 \text{ MPa dry}$

**Moisture Movement:** 0.25 %

**Freeze Thaw:** No distortion after 25 repeated cycles of freezing and thawing .

## PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and  
Additional Product Info.

|                        |                        |   |   |         |
|------------------------|------------------------|---|---|---------|
| PROJECT NAME :         | QTY                    | W | H | OPTIONS |
| ARCHITECT :            |                        |   |   |         |
| DEALER :               |                        |   |   |         |
| CONTRACTOR :           |                        |   |   |         |
| LOCATION :             | SPECIAL INSTRUCTIONS : |   |   |         |
| DATE :                 | SUBMITTAL APPROVAL :   |   |   |         |
| TAGGING INSTRUCTIONS : | (signature or stamp)   |   |   |         |

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)